

MD-20-M

SPECIFICATIONS

3 dB S21 Bandwidth	18 GHz typ.
Small Signal Gain	24 dB typ.
Input 1 dB Compression Point	0 dBm

GENERAL

S11 Characteristics	< -10 dB from 1 to 15 GHz, < -5 dB from 15 to 20 GHz
S22 Characteristics	< -10 dB from 1 to 12 GHz, < -5 dB from 12 to 20 GHz
RF Gain	19 dB to 24 dB, variable
Gain Adjustment Range	5 dB typ.
Gain Ripple	< ± 0.5 dB
Input, Output Impedance	50 Ω
Input VSWR to -10 GHz	1.6 : 1 typ.
Output VSWR	2.0 : 1 typ.
Manual DC Bias Adjustment Range	0 to +10 VDC

ANALOG APPLICATIONS

RF Bandwidth	20 GHz typ.
Max. Output	26 dBm typ.
Input IP3	12 dBm typ.
Group Delay	± 70 ps
Noise Figure	9 dB typ.


DIGITAL APPLICATIONS

Data Rate	Up to 23 Gb/s
Output Amplitude	7.5 V _{p-p} typ.
Pulse Response	10%, rise time 35 ps typ.
Input Range	500 mW to 1.5 V

MECHANICAL


Operating Temperature	-20°C to +70°C
Storage Temperature	-45°C to +100°C
Operating Humidity	85%
Power Supply Requirements	+12 V DC, 1 A max.
Total Power Dissipation	10 W max.
Accessories Included	Cables
RF Input/Output Connector	Input: SMA Female, Output: SMA Male
Electrical Power Connector	4-pin Molex
Remote Interface	USB 2.0
Dimensions	160mm x 65mm x 32.5mm



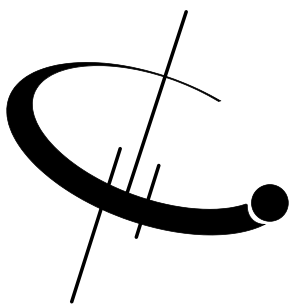


MD-20-M


TYPICAL S21 RESPONSE

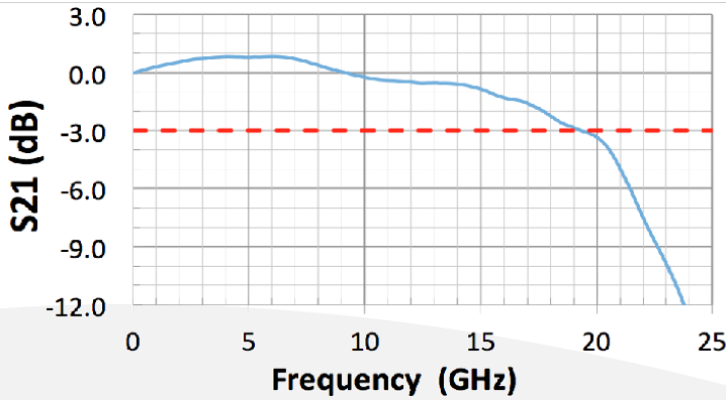


TYPICAL S11 RESPONSE

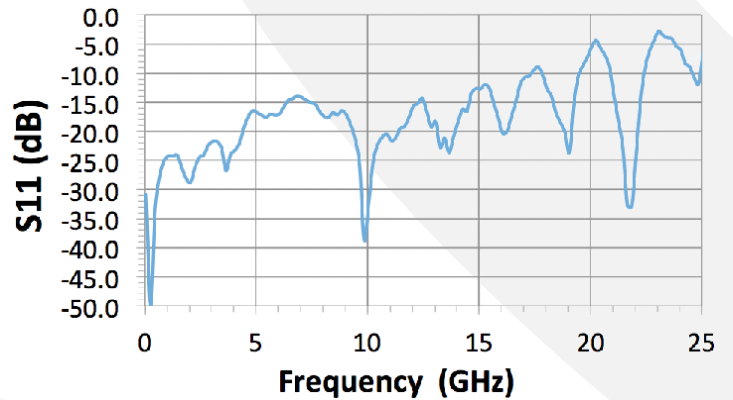


1 DB COMPRESSION

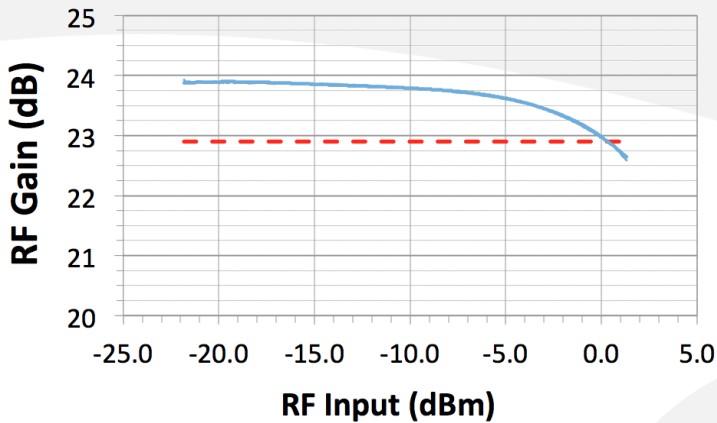


THIRD ORDER INTERCEPT

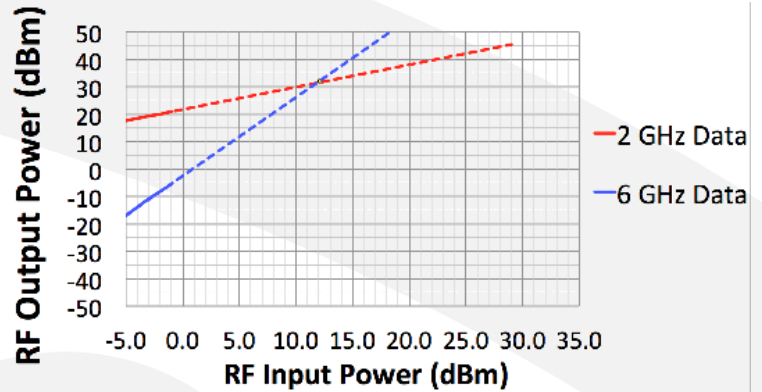


GROUP DELAY

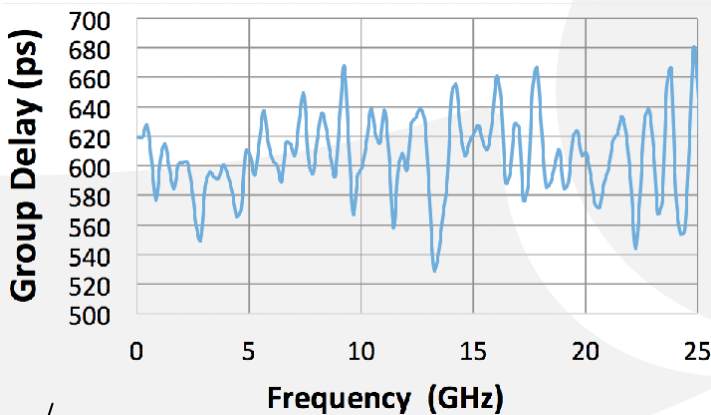



NOISE FIGURE

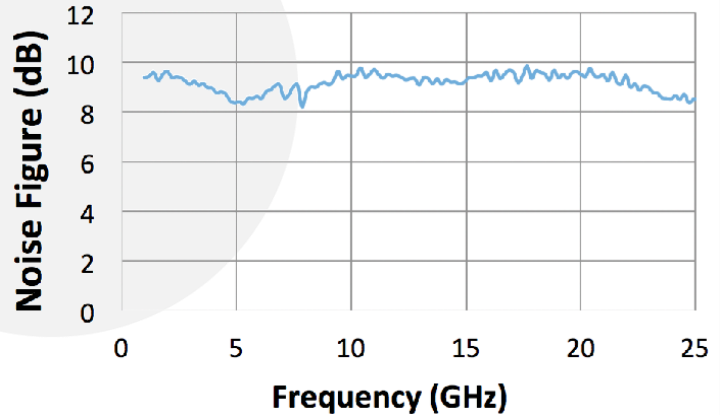

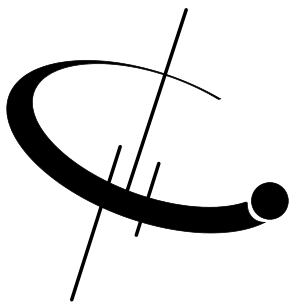

MD-20-M

MECHANICAL DRAWING

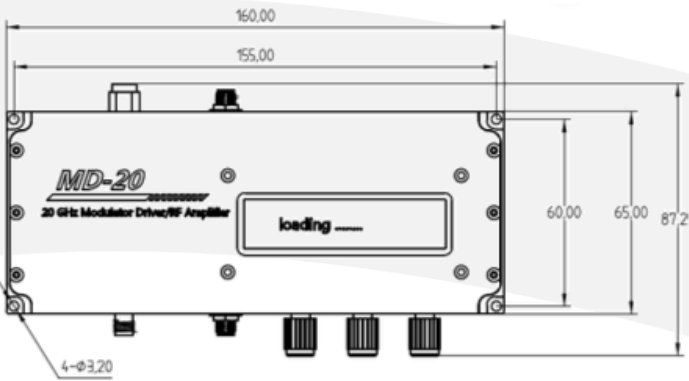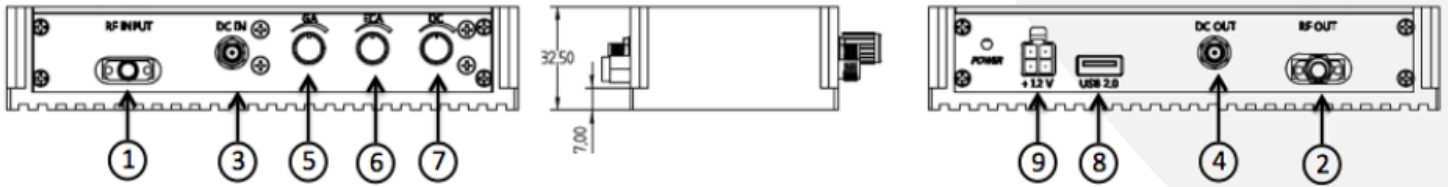

Unit: mm

Port Function Description

1	RF input
2	RF output
3	DC bias input
4	DC bias output
5	RF gain adjust knob
6	Eye crossing adjust knob
7	DC output adjust knob
8	USB 2.0
9	Power input molex

REMOTE LABVIEW INTERFACE

Optilab offers remote interface via LabVIEW software, for parameter adjustment and status monitoring, contact Optilab for more details.

